


Dimensions



Deep Pleat particulate filter cells, type DFH, construction GAL/STA

Dimensional drawing of DFH-...-GAL/DFH-...-STA

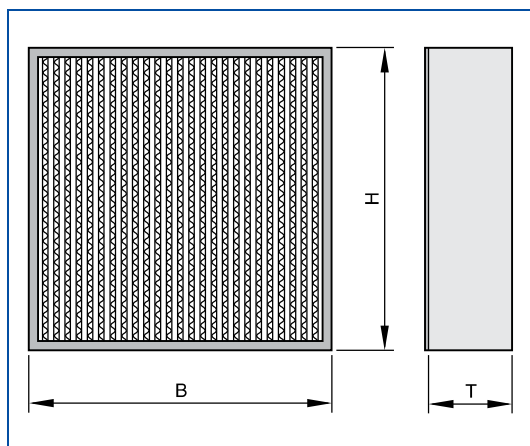

Standard construction

As standard, Deep Pleat particulate filter cells with a frame made of galvanised sheet steel or stainless steel are fitted with a flat section seal on the upstream side

All weights are net, without packaging.

Dimensions [mm] and weight [kg]

Nominal size			①	②		③	④	⑤
B	H	T		l/s	m ³ /h			
305	305	150	E11	69	250	125	2.7	4
287	592	150	E11	146	525	125	4.9	5
592	592	150	E11	301	1085	125	10.1	8
305	610	150	E11	150	540	125	5.3	6
610	610	150	E11	319	1150	125	10.7	10
762	610	150	E11	403	1450	125	13.4	11
305	305	150	H13	69	250	250	2.7	4
287	592	150	H13	146	525	250	4.9	5
592	592	150	H13	301	1085	250	10.1	8
305	610	150	H13	150	540	250	5.3	6
610	610	150	H13	319	1150	250	10.7	10
762	610	150	H13	403	1450	250	13.4	11
305	305	292	E11	146	525	125	5.6	4
287	592	292	E11	267	960	125	10.2	5
592	592	292	E11	550	1980	125	21.1	8
305	610	292	E11	292	1050	125	11.2	6
610	610	292	E11	583	2100	125	22.4	10
762	610	292	E11	729	2625	125	28.0	11
305	305	292	H13	146	525	250	5.6	4
287	592	292	H13	267	960	250	10.2	5
592	592	292	H13	550	1980	250	21.1	8
305	610	292	H13	292	1050	250	11.2	6
610	610	292	H13	583	2100	250	22.4	10
762	610	292	H13	729	2625	250	28.0	11

① Filter class ② Nominal volume flow rate ③ Initial differential pressure ④ Filter area ⑤ Weight